




# Superlight LED 1





## High Performance Floodlight

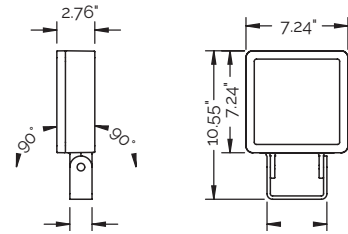

High performance floodlights with efficient reflectors ideal for area lighting, accenting facades, or lighting the ground.

### FEATURES

- Sleek, unobtrusive design allows integration into any style of architecture
- Optimal heat management ensures longevity of the LEDs
- Symmetric and asymmetric wide beam reflectors are ideal for area lighting while rotationally narrow beam reflectors are ideal for accent lighting facades
- 1 x 27W high performance LED
- Integral driver at 120–277V
- Up to 3056 Lumen output
- Up to 113 Lumens/Watt efficacy
- IP67 Rated

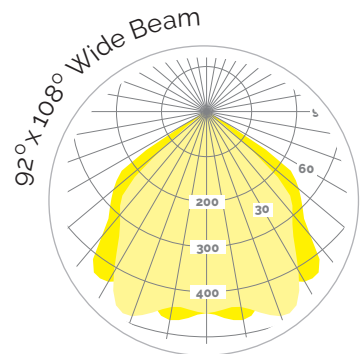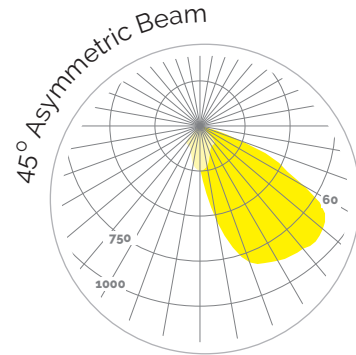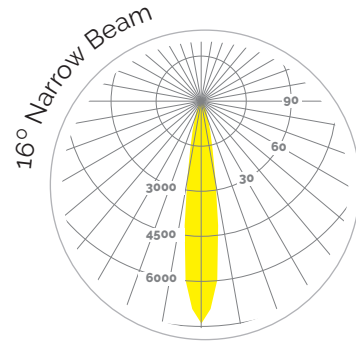

MSL1

# ORDERING

MSL1	27						
------	----	--	--	--	--	--	--

PRODUCT	POWER	LED COLOR	OPTICS	CONTROL	FINISH	MOUNTING	ACCESSORIES
<b>MEYER</b> Superlight LED 1 Floodlight	<b>27</b> 1 x 27W LED	<b>W3</b> 3000K White  <b>W4</b> 4000K Neutral White	<b>16</b> 16° Narrow Beam  <b>45</b> 45° Asymmetric Beam  <b>92</b> 92° x 108° Wide Beam	<b>N</b> Non-Dim <sup>1</sup>  <sup>1</sup> Consult factory for dimming options	<b>B</b> Black  <b>W</b> White  <b>S</b> Silver <sup>2</sup> <sup>2</sup> Premium color	<b>B</b> Mounting Bracket <sup>3</sup>  <b>WA</b> Wall Arm  <b>P</b> Pole Mount  <sup>3</sup> Included Standard	<b>C</b> Cowl  <b>BD</b> Barn Doors  <b>VL</b> Vertical Louver  <b>HL</b> Honeycomb Louver  <b>RB</b> Ribbed Glass

## CONSTRUCTION

- Die cast aluminum housing, polyester powder coat
- All exterior steel parts are stainless steel
- High transmission safety glass, silicon gasket
- High efficiency reflector
- 180° tilt range
- Cable gland

## ACCESSORIES

- Accessories include: Cowl, Barn Doors, Vertical Louver, Honeycomb Louver

## SIZE AND MOUNTING

- Extremely Compact — 7.24H" x 7.24W" x 2.76"D
- Included Mounting Bracket — 4.25"
- 33.7" Aluminum Wall Arm, 41" Overall

## ELECTRICAL

- 120–277 V Integral Driver
- Power Consumption: 27W
- Dimming driver available. Consult factory for details

## LEDS

- 1 x 27W high performance LED in 3000K and 4000K

## FINISHES

- Polyester powder coat in Black, White, and Silver <sup>2</sup>  
<sup>2</sup> premium

## COMPLIANCE

- ETL, IK08 listed
- LM79 Tested, LM70 (50,000 hours)


## WARRANTY

- 3-year limited warranty.
- Complete warranty terms available at [ElectrixIllumination.com](http://ElectrixIllumination.com)

# ACCESSORIES



## COWL

Stainless steel, to avoid glare





## BARN DOORS

Aluminum, to avoid glare





## VERTICAL LOUVER

Stainless steel, to avoid glare



## HONEYCOMB LOUVER

Internal accessory, to avoid glare



## RIBBED GLASS

Internally fitted, for linear beam control, continuously adjustable 360°

