




Nightpath Bollard

LED Pathway Luminaire





MPATH-B

Versatile pathway luminaire built into a robust aluminum profile, whose discreet design will integrate into any architectural environment

FEATURES

- High performance LED optic with 88° asymmetric beam angle
- Average of 1 lux illuminance is achieved up to 3.3' in front of the luminaire
- 13W high performance LED
- 120-277V Integral Driver
- Up to 633 Lumen output
- Up to 51 Lumens/watt
- IP65 and IK08 rated

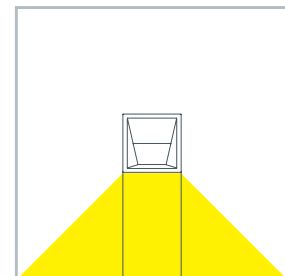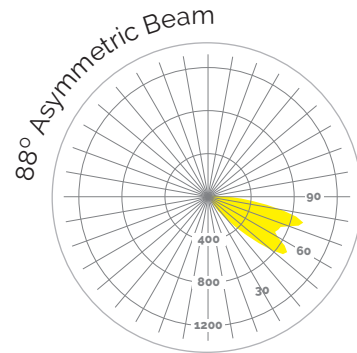

ORDERING

PRODUCT	POWER	LED COLOR	OPTICS	CONTROL	FINISH	HEIGHT	OPTION
MPATH-B MEYER Nightpath Bollard Pathway Luminaire	13 13W LED	W3 3000K White W4 4000K White	A 88° Asymmetric Beam	N Non Dim	B Black W White S Silver ¹ <small>¹Premium color</small>	23 23-5/8" High 39 39-7/16" High	D Door with Connection Box

CONSTRUCTION

- Die cast aluminum housing, polyester powder coat
- Extruded Aluminum post with cast aluminum base plate, polyester powder coat
- Tempered prismatic safety glass
- All exterior parts are stainless steel
- Closure by 4 stainless steel screws

ACCESSORIES

- Ground extension galvanized steel, to be buried in the ground for extra stability
- Polycarbonate cover, for protection against vandalism, for flush mounting in luminaire housing

SIZE AND MOUNTING

Bollards available in two sizes:

- 23-5/8" high x 7" wide x 5-1/8" deep
- 39-7/16" high x 7" wide x 5-1/8" deep

ELECTRICAL

- 120 - 277V Integral Driver
- Power Consumption: 13W

LEDS

- 5 x 2.5W high performance in 3000K and 4000K

FINISHES

- Polyester powder coat in Black, White, and Silver ¹

¹ premium

COMPLIANCE

- ETL Listed
- IP65, IK08 rated
- LM79 Tested, LM70 (50,000 hours)

WARRANTY

- 3-year limited warranty.
- Complete warranty terms available at ElectrixIllumination.com